

# Model Year 2020 Tire Compatibility

## Recommended Maximum Tire Dimensions

The recommended maximum tire widths below are only an estimate. All tire dimensions differ from their printed dimensions and may vary due to rim width.

It is the responsibility of the rider to measure the tire/fork clearance to guarantee a safe tire/fork combination.

FORK MODEL				FORK WHEEL SIZE - <i>not all forks available in every wheel size</i>						
				26	27.5	27.5 Boost	29	29 Boost	29+	700C
35 BoXXer Judy Lyrik	Pike	Recon	Sektor	2.25"	2.5"	2.8"	2.5"	29 x 2.8"	2.8"	-
	Pike DJ	RS-1	XC 30							
	Reba	Revelation	Yari							
	Reba 26	SID								
30 Silver 30 Gold				2.25"	2.25"	-	2.25"	-	-	-
Recon Gold RL					2.5"	2.5"	2.5"	2.5"	-	-
Bluto				4.5"	-	-	-	-	-	-
Paragon				-	-	-	-	-	-	43C

### Tire Clearance Measurement

1. Remove the air cap and depress the air valve to deflate the fork. (For coil forks, refer to the fork service manual for spring removal and installation)
2. Compress the fork to bottom out. You may need to depress the air valve again to remove any remaining air from the fork to achieve bottom out.
3. Measure the space between the top of the tire and the bottom of the fork crown.

#### ⚠ WARNING

There must be a minimum of 6 mm between the top of the tire and the fork crown and the side of the tire and the lower leg when the fork is in the bottom out position and the tire is fully inflated.


4. Inflate the fork to the desired pressure (or install the coil spring) and install the air cap.



1



2

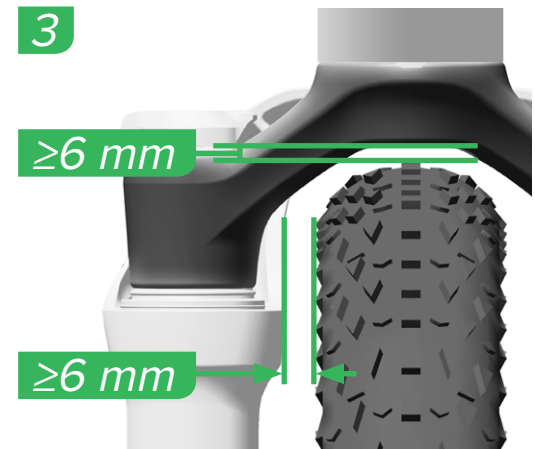

Remove/Loosen



Adjust



Measure